



Art. no. **6700**  
Art. no. **6701**

Art. no. **6700**

Manual diesel dispensing nozzle, body in aluminium, with plastic hose tail  $\varnothing$  25 mm and dispensing outlet with  $\varnothing$  ext. 25 mm, with latch for locking of trigger.

Max flow rate 80 l/min.

The nozzle can also be used for the dispensing of oils with a max. pressure of 3.5 bar.

Art. no. **6701**

Same as art. no. 6700, but with inlet swivel 1" BSP (M-F).




Art. no. **6702**

Art. no. **6702**

Manual diesel dispensing nozzle, body in aluminium with plastic handle protector, with inlet swivel 1" BSP (M-F) and dispensing outlet with  $\varnothing$  ext. 25 mm, with latch for locking of trigger.

Max flow rate 150 l/min.

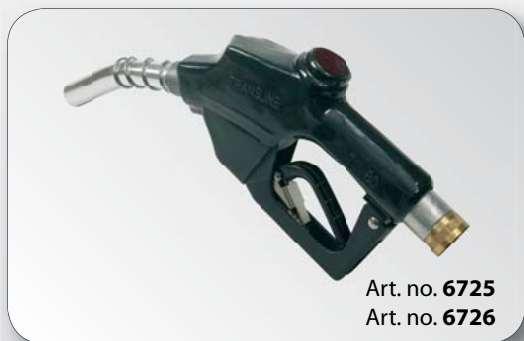

Art. no. **6725**  
Art. no. **6726**

Art. no. **6725**

Automatic diesel dispensing nozzle, body in aluminium with rubber protection, with inlet swivel 1" BSP (M-F) and dispensing outlet with  $\varnothing$  ext. 24 mm.

Max flow rate 60 l/min.

Art. no. **6726**

Automatic diesel dispensing nozzle, body in aluminium with rubber protection, with inlet swivel 1" BSP (M-F) and dispensing outlet with  $\varnothing$  ext. 29 mm.

Max flow rate 120 l/min.



Art. no. **6721**

Art. no. **6721**

Automatic diesel dispensing nozzle, high delivery version, body in aluminium, with inlet swivel 1' 1/2" BSP (M-F) and dispensing outlet with  $\varnothing$  ext. 39 mm, with latch for locking of trigger.

Max flow rate 280 l/min.



Art. no. **2107**

Art. no. **2107/34**

Inlet swivel 3/4" BSP (M) – 1" BSP (F).

Art. no. **2107/10**

Inlet swivel 1" BSP (M) – 1" BSP (F).

Art. no. **2107/35**

Inlet swivel 3/4" BSP (M) – 1" BSP (M).

Art. no. **2107/36**

Inlet swivel 1" BSP (M) – 1" BSP (M).

Art. no. **2107/33**

Inlet swivel 3/4" BSP (M) – 3/4" BSP (M).