

Pneumatic oil pumps with double compressed air outlet distributor, assuring higher delivery rates compared to the standard versions.

TWDE SERIES

oil

3:1



Double acting - 28 l/min

Art.no. **2030 TWDE**



Double acting - 28 l/min

Art.no. **2020 TWDE**



Double acting - 22 l/min

Art.no. **2035 TWDE**

5:1



Double acting - 22 l/min

Art.no. **2025 TWDE**




Single acting - 17 l/min

Art.no. **2075/L TWDE**

See accessories on pages 74-75 and 86-94!

Art. no.	2020TWDE	2030TWDE	2025TWDE	2035TWDE	2075/L TWDE
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)				
Rapporto compressione	3:1		5:1		
Pressione di uscita	24 bar (350 psi)		40 bar (580 psi)		
Delivery	28 l/min		22 l/min		17 l/min
Connection compressed air	3/8" BSP (F)				
Connection lubricant outlet	1/2" BSP (M)				
Max air consumption with 8 bar pressure max	230 l/min		260 l/min		230 l/min
Length suction tube	950 mm	650 mm	950 mm	650 mm	950 mm
Diameter suction tube	40 mm				
Suitable for drums of	208 l	60 l	208 l	60 l	208 l
Weight	5.5 kg	5 kg	5.7 kg	5.3 kg	4 kg
Dimensions (LxWxH) (mm)	95x95x1270	95x95x1070	95x95x1270	95x95x1070	95x95x1270

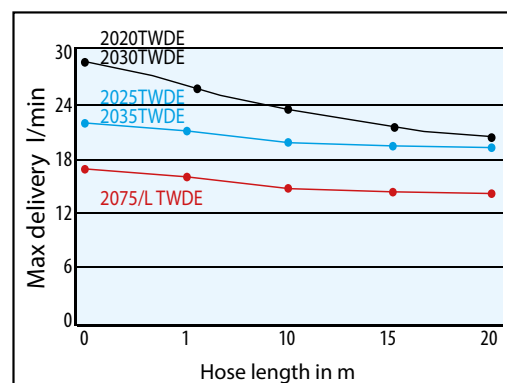

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.