

Pneumatic pumps for the supply of medium and high viscosity oils for the use in mobile kits or in pipeworks.

TAPIR SERIES

6:1

2:1

5:1

5:1

6:1

Single acting - 32 l/min

Double acting - 48 l/min

Double acting - 18 l/min

Double acting - 18 l/min

Single acting - 32 l/min

Art.no. 2012

Art.no. 2013

Art.no. 2015

Art.no. 2204 L 950 mm

Art.no. 2014

Art.no. 2011

Art.no. 2203

Art.no. 2205
Ø 1" 1.5 m

Art.no. 4340

Art.no. 2204 L 950 mm

Art.no. 2016


Art.no. 2017

Art.no. 2203

Art.no. 2205
Ø 1" 1.5 m

See accessories on pages
74-75 and 86-94!

Art. no.	2011	2012	2013	2014	2015	2016	2017
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)						
Compression ratio	5:1	6:1	2:1	5:1		6:1	
Outlet pressure	40 bar (580 psi)	48 bar (700 psi)	16 bar (232 psi)	40 bar (580 psi)		48 bar (700 psi)	
Delivery	18 l/min	32 l/min	48 l/min	18 l/min		32 l/min	
Connection compressed air	1/4" BSP (F)	1/2" BSP (F)		1/4" BSP (F)		1/2" BSP (F)	
Connection lubricant outlet	3/4" BSP (M)						
Max air consumption with 8 bar pressure	220 l/min	260 l/min		220 l/min		260 l/min	260 l/min
Length suction tube	380 mm			950 mm			240 mm
Diameter suction tube	-	40 mm	55 mm	40 mm			-
Suitable for drums of	Any			208 l			Any
Weight	7.5 kg	11 kg	8.5 kg	9.2 kg	8.2 kg	12.5 kg	7.8 kg
Dimensions (LxWxH) (mm)	95x95x780	95x95x1270		95x95x1500	95x95x1270	95x95x1500	95x95x700

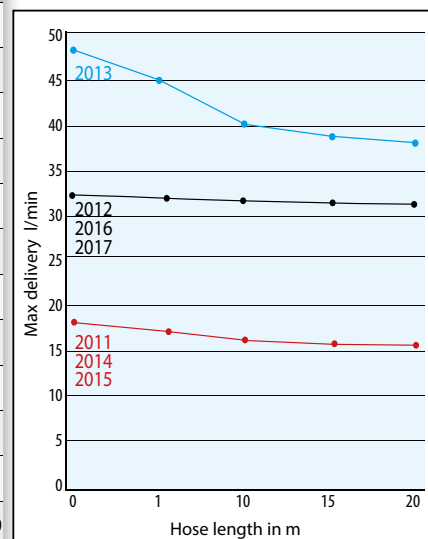

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.