

Heavy duty pneumatic pumps, industrial pump series "Power Bull", designed for the supply of oil under demanding conditions. Particularly suitable for the oil distribution in pipeworks and installations where a simultaneous supply of oil is required on different dispensing points at high pressure and/or with a high delivery.

POWER BULL SERIES



Single acting - Delivery 27 l/min

Art.no. **2055**



Single acting - Delivery 15 l/min

Art.no. **2056**



Single acting - Delivery 42 l/min

Art.no. **2096**



Single acting - Delivery 34 l/min

Art.no. **2097**




Single acting - Delivery 122 l/min

Art.no. **2098**

See accessories on pages
74-75 and 86-94!

Art. no.	2055	2056	2096	2097	2098
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)				
Compression ratio	10:1	16:1	5:1	10:1	1.5:1
Delivery	27 l/min	15 l/min	42 l/min	34 l/min	122 l/min
Outlet pressure	80 bar (1160 psi)	128 bar (1860 psi)	48 bar (700 psi)	80 bar (1160 psi)	12 bar (175 psi)
Max frequency strokes/min	150	120			
Max air consumption with 8 bar pressure	2.05 m ³ /min	1.80 m ³ /min			1.92 m ³ /min
Diameter pneumatic piston	100 mm	125 mm	125 mm	160 mm	125 mm
Diameter suction tube	50 x 40 mm	50 x 40 mm	80 x 70 mm	80 x 70 mm	110 x 100 mm
Connection lubricant outlet	1" BSP (F)				
Connection compressed air	1/2" BSP (F)				
Application	Wall mounted pump				
Weight	15 kg	16 kg	20 kg	23 kg	21 kg
Dimensions (LxWxH) (mm)	158x160x1070		158x160x800		158x160x1070

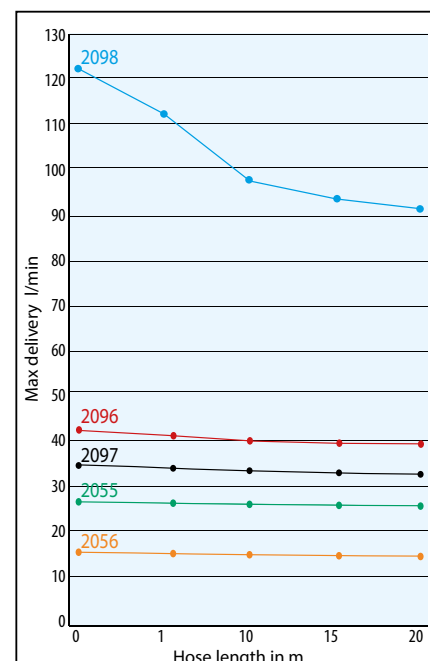

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.