


Manual lever action and rotary drum pumps, made of carbon steel with components in aluminium.
Main fields of application: transfers and dispenses of small quantities of oil or diesel from drums.

oil



23 l/min

Art.no. 5300

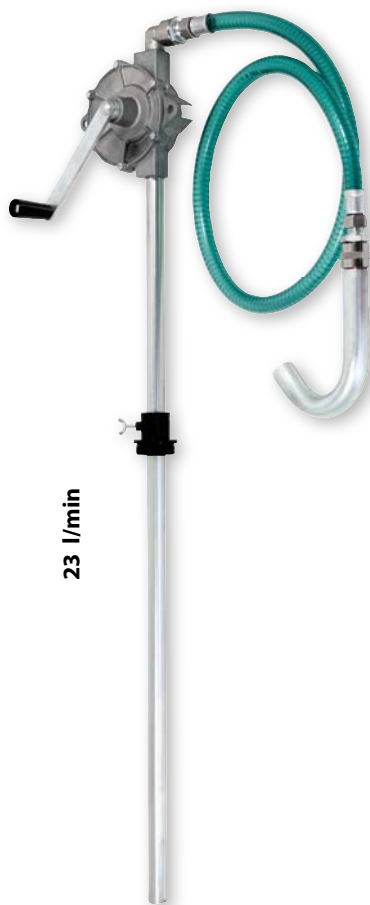

23 l/min

Art.no. 5300/FD



12 l/min

Imported Article

Art.no. 5409



9 l/min - 13.5 l/min

Art.no. 5400
Art.no. 5450



25 l/min

Art.no. 5415

Art. no.	5409	5415	5300 5300/FD	5400	5450
Delivery	12 l/min	25 l/min	23 l/min	9 l/min	13.5 l/min
Delivery/stroke (rotation)	0.25 l		0.32 l	0.11 l	0.40 l
Connection lubricant outlet	3/4" BSP (M)	Hose tail Ø 20 mm			
Length suction tube	1000 mm	650 mm	1000 mm		
Dimensions LxWxH (mm)	100x100x944		300x220x1070	100x100x944	120x120x1110
Suitable for drums of	60/208 l	60 l	208 l		
Weight	1.8 kg		3.8 kg	1.3 kg	2.2 kg

Suitable especially for use with gear oils up to SAE 140.

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C -- free flow outlet