



Art.no. 2114

Art.no. **2114**
Automatic anti-drip nozzle, Ø 12 mm - length 34 mm.
Connection M10x1 (F).



Art.no. 2121

Art.no. **2121**
Manual anti-drip nozzle Ø 12.5 mm. Connection M10x1 (F).




Art.no. 2143

Art.no. **2143**
Automatic anti-drip nozzle ø 29 mm, suitable for high delivery
oil control guns, connection 1" BSP (F).



Art.no. 2146

Art.no. **2146**
Manual anti-drip nozzle with tap Ø 12.5 mm.
Connection M10x1 (F).

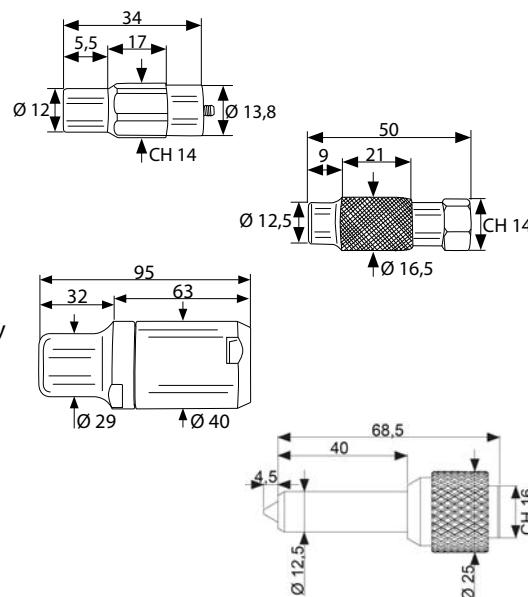

Art.no. **2104**
Straight flexible rubber outlet, length 300 mm, with manual anti-drip nozzle with screw
regulation. Connection 1/2" BSP (M).

Art.no. **2108**
Curved rigid outlet, Ø 12 mm, 1/2" BSP (M), with automatic anti-drip nozzle.



Art.no. **2110**
Standard rigid outlet, Ø 12 mm, 1/2" BSP (M), with automatic anti-drip nozzle.

Art.no. **2115**
Standard rigid outlet, Ø 16 mm, 1/2" BSP (M), with automatic anti-drip nozzle.



Art.no. **2132**
Flexible rubber outlet, Ø 1/2", with curved rigid 80° stem and automatic anti-drip nozzle.
Connection 1/2" BSP (M).

Art.no. **2136**
Flexible rubber outlet, ø 1/2", with curved rigid 90° stem and combined manual anti-drip
nozzle with tap, art.no. 2146. Connection 1/2" BSP (M).



Art.no. **2140**
Inline oil flow control tube, with transparent insert. Connection 1/2" BSP (M/F).

Art.no. **2142**
Flexible rubber outlet, Ø 1/2", with curved rigid 80° stem and manual anti-drip nozzle.
Connection 1/2" BSP (M).



Art.no. **1107**
Inlet swivel, in stainless steel AISI 304, connections 1/2" BSP (M), max static pressure 200 bar.

Art.no. **2106**
Inlet swivel, in galvanized steel, connections 1/2" BSP (M), max static pressure 200 bar.

Art.no. **2106/NPT**
Inlet swivel, in galvanized steel, connections 1/2" BSP -NPT (M), max static pressure 200 bar.



Art.no. **2107/34**
Inlet swivel, in galvanized steel, connections
3/4" BSP (M) - 1" BSP (F), max. static pressure
150 bar.

Art.no. **2107/10**
Inlet swivel, in galvanized steel, connections
1" BSP (M) - 1" BSP (F), max. static pressure
150 bar.

Art.no. **2107/35**
Inlet swivel, in galvanized steel, connections
3/4" BSP (M) - 1" BSP (M), max. static pressure
150 bar.

Art.no. **2107/36**
Inlet swivel, in galvanized steel, connections
1" BSP (M) - 1" BSP (M), max. static pressure
150 bar.

Art.no. **2107/33**
Inlet swivel, in galvanized steel, connections
3/4" BSP (M) - 3/4" BSP (M), max. static pressure
150 bar.