



ELECTRICAL SAFETY PANEL 230 VAC / 380 VAC THREE-PHASE

OPTIONAL



Art.no. **7370T+4265**
Art.no. **7377+4265**

Metal electrical safety panel 230 VAC (Art.no. 7370T) or 380 VAC (Art.no. 7377) which allows to stop of the pump at the end of the dispensing operation.


This kit includes the pressure switch.

Art.no.	Dimensions	Alim.	Weight	Ampere	Frequency	Protection
7370T	600x400x280(h) mm	230 VAC	10 kg	4 A	50 Hz	IP 55
7377		380 VAC				

Art.no. **4095/20** Art.no. **4096/20**
Art.no. **4095/50** Art.no. **4096/50**
Art.no. **4095/180** Art.no. **4096/180**

Electric pumps **230 VAC / 380 VAC three-phase 50 Hz** (upon request **60 Hz**), designed for grease distribution or forced lubrication in demanding centralized applications where the power supply is available. These pumps offer the possibility to easily switch the different lengths of suction tubes and are also provided with a relief valve.

Optional: electric panel and pressure switch, Ø 28 mm Aluminum drum bung adapter Art.no. 4327, Ø 28 mm Aluminum lock ring Art.no. 4348.

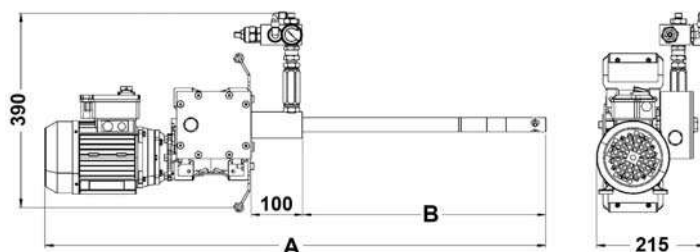

Art.no.	Voltage	Ampere	Engine revolutions reduction ratio	Total length (A)	Suction tube length (B)	Suction tube dimensions	Max Outlet pressure	Flow rate	RPM	Power	Suitable for drums of	Weight
4095/20	230 VAC / 380 VAC - three-phase - 50 Hz	5,3 A (230 VAC)	7,5:1	1025	480	Outer diameter 28 mm Piston diameter 14 mm	400 bar (5801 psi)	400 g/min	1400	1.1 kW	18 - 25 kg	22 kg
4095/50				1285	740						50 kg	23 kg
4095/180				1490	950						180 kg	24 kg
4096/20		3,1 A (380 VAC)	10:1	1025	480	Outer diameter 28 mm Piston diameter 16 mm	250 bar (3626 psi)	1200 g/min	2850		18 - 25 kg	22 kg
4096/50				1285	740						50 kg	23 kg
4096/180				1490	950						180 kg	24 kg

The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C