

Pneumatic pumps for the transfer of low viscosity oils and antifreeze at high delivery and short pumping distances.

**STANDARD
SERIES**

1:1



Single acting - 35 l/min

Art.no. **2043**
Oil
Waste oil

Art.no. **2049**
Pure antifreeze



Single acting - 35 l/min

Art.no. **2043/L**
Oil

Art.no. **2047/L**
Pure antifreeze



Double acting - 48 l/min

Art.no. **2040**
Oil




Art.no. **2044 Oil / Waste oil**

Art.no. **2047 Antifreeze**

Art. no.	2040	2043 2049	2044 2047	2043/L 2047/L
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)			
Compression ratio	1:1			
Outlet pressure	8 bar (116 psi)			
Delivery	48 l/min	35 l/min		
Connection compressed air	1/4" BSP (F)			
Connection lubricant outlet	3/4" BSP (M)			
Max air consumption with 8 bar pressure	210 l/min			
Length suction tube	950 mm	250 mm	-	950 mm
Diameter suction tube	55 mm			
Suitable for drums of	208 l	Any	Any	208 l
Weight	6.6 kg	4.4 kg	4.5 kg	5.2 kg
Dimensions (LxWxH) (mm)	95x95x1180	95x95x530	110x110x530	95x95x1180

See accessories on pages
74-75 and 86-94!

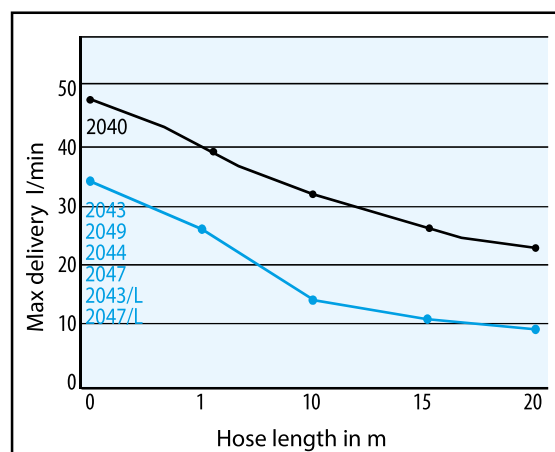

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar - free flow outlet.