


SIRIO COMPACT hose reel with chain drive and with 12/24 VDC motor.

VERSION WITH REDUCED DIMENSIONS



COMPACT VERSION

12/24V Motor

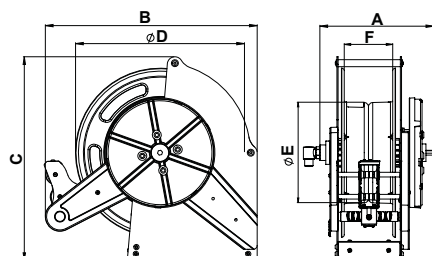

400 SERIES - SC1 Ø Disc 434 mm - Spool 130 mm - Drum 250 mm

	Art.no. 12 Vdc	Art.no. 24 Vdc	Max. pressure joint	Connection threads IN - OUT	Max diameter hose	Max length hose (m)	Swivel joint*
PAINTED STEEL	SCF1242130	SCF2442130	600 bar **	1/2"(M) 1/2"(F)	1/4"	40	9951
					3/8"	25	
					1/2"	18	
	SCF1242131	SCF2442131	100 bar	1"(M)-3/4"(F)	3/4"	12	9986
					1"	8	
AISI 304 STAINLESS STEEL	SCX1242130	SCX2442130	200 bar **	1/2"(M) 1/2"(F)	1/4"	40	9963
					3/8"	25	
					1/2"	18	
	SCX1242131	SCX2442131	100 bar	1"(M)-3/4"(F)	3/4"	12	9986
					1"	8	

*) The reels in painted steel are equipped with mineral oil compatible swivel joint gaskets. The hose reels in stainless steel come with water-compatible Viton® swivel joint gaskets. See pages 263-265 for the complete range of swivel joints with gaskets compatible with other liquids.

**) When ordering, specify whether or not the application implies the use of low pressure hoses (see page 266 regarding the splitting of the roller).

DIMENSIONS AND PACKAGING

Art.no.	D (mm)	F (mm)	E (mm)	A-B-C (mm)	Packaging dimensions (mm)	Weight (kg)
SC1	434	130	250	335x544x524	670x800x900	26

SIRIO ID

HYDRAULIC MOTOR DRIVEN HOSE REEL


In the **SIRIO ID** version the hydraulic control unit (available with 24 Vdc or 230 Vac power supply) is supplied separately and its housing must be managed by the end user.



F1 – Control unit 12/24Vdc
Art.no. 22024 (24Vdc)
Art.no. 22012 (12Vdc)



F2 – Control unit 230Vac
Art.no. 22023

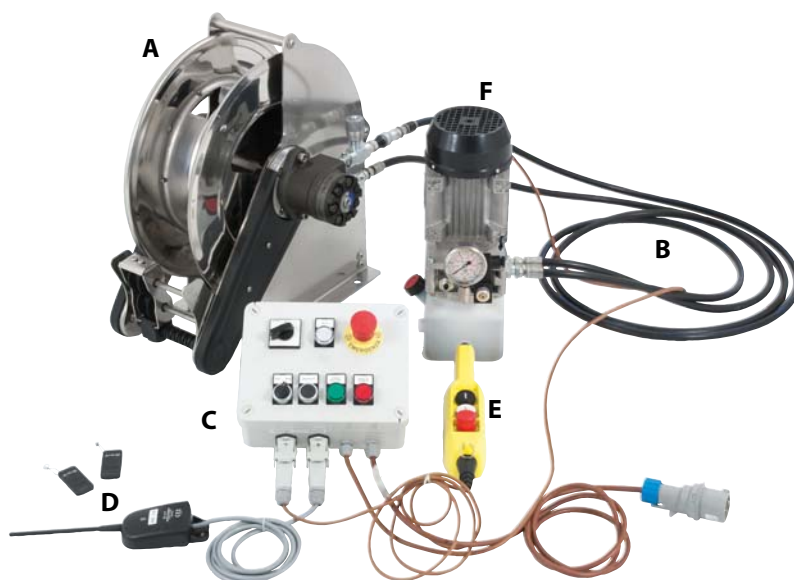

EXAMPLE OF COMPLETE HYDRAULIC KIT

- A** SIRIO ID hydraulic hose reel
- B** Hydraulic pipes (optional)
- C** Complete control panel (optional)
- D** Remote control (optional)
- E** Button panel (optional)
- F** Electro-hydraulic control unit (optional)