

HEAVY DUTY TITANO **with reinforced spring**

The **TITANO HEAVY DUTY** line was developed with reinforced spring and characterized by robustness and stability, for use in the most demanding applications where hoses up to Ø 1 1/4" / Ø 1 1/2" are required.

It is supplied as standard with manual hose guide but with the possibility of being equipped with an automatic **HOVA[®]TG** hose guide. To order the automatic hose guide add **TG** to the reel's code (e.g. TF5340350TG).




OPTIONAL
HOVA[®]TG Automatic hose guide

Patent Pending

LEGEND

- A** Manual hose guide
- B1** Swivel joint side base arm
- B2** Spring drive side base arm
- C** Spring
- D1** Hose exit side disc/drum assembly
- D2** Spring side disc/drum assembly and carter
- E** Guide arm cover

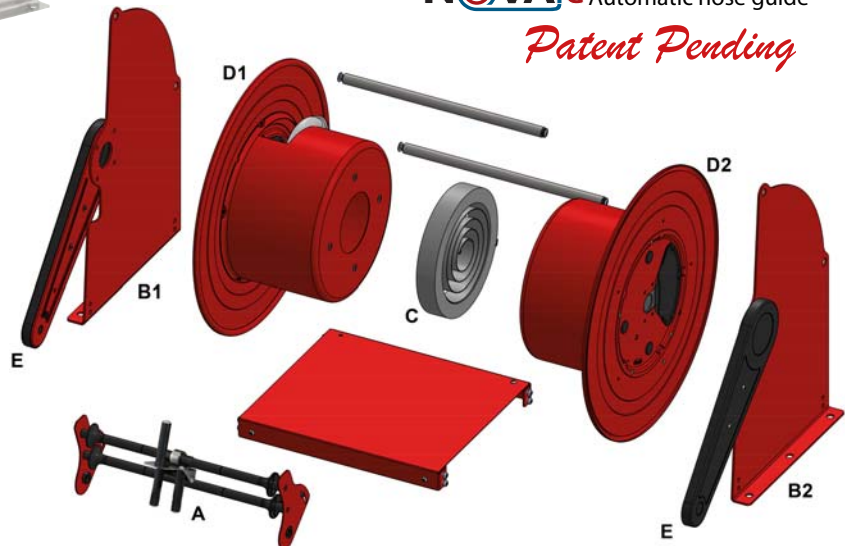


WITH MANUAL HOSE GUIDE



SPRING SERIES - T1 Ø Disc 600 mm - Spool 400 mm - Drum 335 mm

	Art.no. CON GUIDATUBO MANUALE	Max. pressure joint	Connection threads IN - OUT	Spring	Max diameter hose	Max length hose (m)	Swivel joint*
PAINTED STEEL	TF6340351	100 bar	1"(M)-3/4"(F)	35m	3/4" - 1"	35	9986
	TF6340202	20 bar	1 1/4"(M)-1 1/4"(M)	20m	1 1/4"	18	9982
	TF6340203		1 1/4"(M)-1 1/2"(M)		1 1/2"	12	9983
AISI 304 STAINLESS STEEL	TX6340351	100 bar	1"(M)-3/4"(F)	35m	3/4" - 1"	35	9986
	TX6340202	20 bar	1 1/4"(M)-1 1/4"(M)	20m	1 1/4"	18	9982
	TX6340203		1 1/4"(M)-1 1/2"(M)		1 1/2"	12	9983

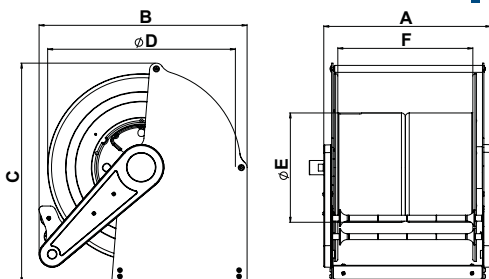

*) The reels in painted steel are equipped with mineral oil compatible swivel joint gaskets. The hose reels in stainless steel come with water-compatible Viton[®] swivel joint gaskets. See pages 263-265 for the complete range of swivel joints with gaskets compatible with other liquids.

**) When ordering, specify whether or not the application implies the use of low pressure hoses (see page 266 regarding the splitting of the roller).

DIMENSIONS AND PACKAGING

Art.no.	D (mm)	F (mm)	E (mm)	A-B-C (mm)	Packaging dimensions (mm)	Weight (kg)
T1	600	400	335	481x765x830	670x800x900	40