


FLEXBIMEC hose reels, in addition to the standard versions, can be offered in **custom sizes** to meet specific application needs.



The discs are available in different sizes, including custom made, for all space requirements:

- A: Ø 330mm
- B: Ø 434mm
- C: Ø 540mm
- D: Ø 600mm / 660mm
- E: Ø 1100mm

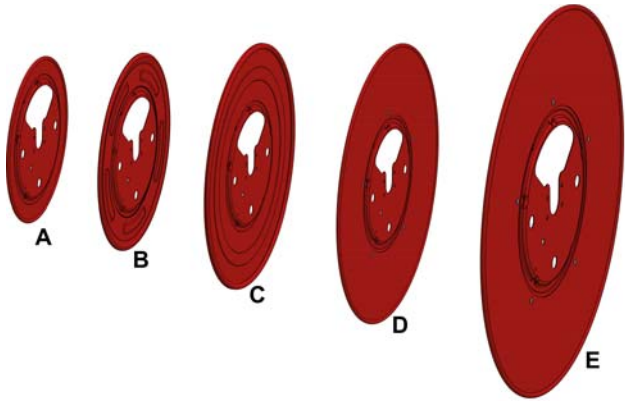

On request it is possible to provide a lowered version of the ANDROMEDA models with **HOVA**® hose guide, reducing its height **UP TO 5 CM less**.

THIN REEL LINE

SPECIAL HOSE REELS

The **Thin Reel line** was developed to manage hoses where there is a need to work in limited spaces. The innovative construction design makes the hose reel particularly suitable for applications with limited space availability.

The reels are designed with a single guide arm to be able to be allocated in small spaces.


Art.no. **9504**

Automatic rewind, spring-driven hose reel, **series THIN REEL**, in painted steel, suitable for hoses of max 8 m length (ø hose 1/2") or max 15 m length (ø hose 1/4").

The hose reel is supplied without hoses and can be used with hoses for the supply of **oils, grease and compressed air**.

Art.no. **9505**

Same as art.no. 9504, but equipped with wetted parts in stainless steel AISI 304, for the use with **AdBlue®/DEF/AUS32, water, antifreeze, compressed air and water-based fluids, at low pressure**.



THIN REEL 300 SERIES

Ø Disc 332 mm - Spool 75 mm

PAINTED
STEEL

Art.no.	Max working pressure	Connection threads IN - OUT	Max diameter hose	Max length hose 1/2" - 1/4" (m)	Material wetted parts	Weight (kg)	Packaging dimensions (mm)
9504	100 bar	1/2" (F) - 1/2" (M)	1/2"	8 - 15	Brass	9	600x510x270
9505	15 bar				Stainless steel AISI 304		