


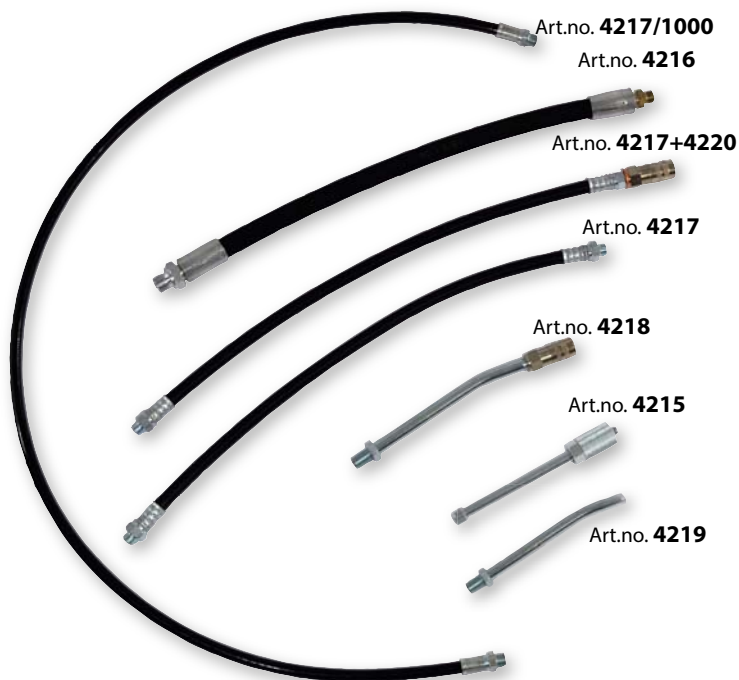

Art.no. **4215** - Extension pipe for hydraulic 4 – jaws – couplers, length 130 mm, with quick coupling and connection M 10x1.

Art.no. **4216** - Double steel braid rubber outlet hose 1/4", SAE 100 R2 AT, length 400 mm; connections M 10x1 – 1/4" BSP (M).

Art.no. **4217** - Steel braid rubber outlet hose DIN 1283 ø ext. 10 mm, length 400 mm, max. working pressure 400 bar, burst pressure 1000 bar; connections M 10x1.

Art.no. **4217/1000** - Steel braid rubber outlet hose DIN 1283 ø ext. 10 mm, length 1000 mm, max. working pressure 400 bar, burst pressure 1000 bar; connections M 10x1.

Art.no. **4217+4220** - Steel braid rubber outlet hose ø ext. 10 mm, length 400 mm, max. working pressure 400 bar, burst pressure 1000 bar with hydraulic 4 – jaws – coupler; connections M 10x1.

Art.no. **4218** - Angled rigid outlet pipe, length 200 mm, with hydraulic 4 – jaws – coupler; connections M 10x1.

Art.no. **4219** - Angled rigid outlet pipe, length 130 mm; connections M 10x1.



Art.no. **4234** - Angled rigid outlet pipe, connection 1/2" (M), with quick coupling, for the grease refilling of lever grease guns through grease gun filler pumps.

Art.no. **4216 + 4233** - Double steel braid rubber outlet hose 1/4", length 400 mm, connection 1/4" (M), with steel quick coupling, connection thread BSP 1/4" (F), in accordance with norm ISO 7241-1 B, to be connected on grease reservoirs in centralized lubrication systems for refilling.

Art.no. **4235** - Curved rigid outlet pipe, connection ø 1/2" (M), for the refilling of grease reservoirs in centralized lubrication systems.

Art.no. **4233** - Steel quick coupling, connection thread BSP 1/4" (F), in accordance with norm ISO 7241-1 B, suitable for the use with refilling accessories for the refilling of grease reservoirs in centralized lubrication systems.

Art.no. **4233M** - Hydraulic quick connector 1/4" (M), connection thread 1/4" (F), in accordance with norm ISO 7241-1 B, suitable for the use in combination with art.no. 4233.

Art.no. **4237** - Hydraulic quick coupling, connection thread BSP 1/2" (F), in accordance with norm ISO 7241-1 B, suitable for the use with refilling accessories for the refilling of grease reservoirs in centralized lubrication systems.

Art.no. **4237M** - Hydraulic quick connector 1/2" (M), connection thread 1/2" (F), in accordance with norm ISO 7241-1 B, suitable for the use with refilling accessories for the refilling of grease reservoirs in centralized lubrication systems.



Art.no. **4328**

Plastic bung adapter for fixation of pumps, 2" BSP (M) x 28 mm.

Art.no. **4340**

Plastic bung adapter for fixation of pumps, 2" BSP (M) x 40 mm.

Art.no. **4341**

Plastic lock ring for bung adapter, 2" BSP (M), for art. nos. 4328, 4340.