



500 SERIES - O4 Ø Disc 540 mm - Spool 130 mm - Drum 250 mm

	Art.no. WITH HOSE GUIDE	Art.no. WITHOUT HOSE GUIDE	Max. pressure joint	Connection threads IN - OUT	Max diameter hose	Max length hose (m)	Swivel joint*
PAINTED STEEL	OF52130	OSGF52130	600 bar **	1/2" (M) 1/2" (F)	1/4"	60	9951
					3/8"	50	
					1/2"	40	
	OF52131	OSGF52131	100 bar	1"(M)-3/4"(F)	3/4"	20	9986
					1"	13	
AISI 304 STAINLESS STEEL	OX52130	OSGF52130	200 bar **	1/2" (M) 1/2" (F)	1/4"	60	9963
					3/8"	50	
					1/2"	40	
	OX52131	OSGF52131	100 bar	1"(M)-3/4"(F)	3/4"	20	9986
					1"	13	


500 SERIES - O5 Ø Disc 540 mm - Spool 195 mm - Drum 250 mm

	Art.no. WITH HOSE GUIDE	Art.no. WITHOUT HOSE GUIDE	Max. pressure joint	Connection threads IN - OUT	Max diameter hose	Max length hose (m)	Swivel joint*
PAINTED STEEL	OF52191	OSGF52191	100 bar	1"(M)-3/4"(F)	3/4"	30	9986
					1"	18	
AISI 304 STAINLESS STEEL	OX52191	OSGX52191	100 bar	1"(M)-3/4"(F)	3/4"	30	9986
					1"	18	



500 SERIES - O6 Ø Disc 540 mm - Spool 260 mm - Drum 250 mm

	Art.no. WITH HOSE GUIDE	Art.no. WITHOUT HOSE GUIDE	Max. pressure joint	Connection threads IN - OUT	Max diameter hose	Max length hose (m)	Swivel joint*
PAINTED STEEL	OF52261	OSGF52261	100 bar	1"(M)-3/4"(F)	3/4"	40	9986
					1"	30	
AISI 304 STAINLESS STEEL	OX52261	OSGX52261	100 bar	1"(M)-3/4"(F)	3/4"	40	9986
					1"	30	

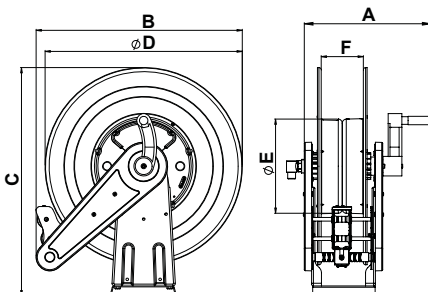

*) The reels in painted steel are equipped with mineral oil compatible swivel joint gaskets. The hose reels in stainless steel come with water-compatible Viton® swivel joint gaskets. See pages 263-265 for the complete range of swivel joints with gaskets compatible with other liquids.

**) When ordering, specify whether or not the application implies the use of low pressure hoses (see page 266 regarding the splitting of the roller).

DIMENSIONS AND PACKAGING

Art.no.	D (mm)	F (mm)	E (mm)	A-B-C (mm)	Packaging dimensions (mm)	Weight (kg)
O4	540	130	250	396x565x625	700x370x700	20
O5	540	195	250	461x565x626	700x420x660	22
O6	540	260	250	526x565x626	700x420x660	23