

Art.no. **3111**

Pneumatic tank drilling machine, portable version.

Allows to carry out the evacuation of petrol or diesel in vehicles in an easy, fast and safe way by drilling through the tank.

The machine is equipped with an interchangeable, non-arcing drill bit, an in-line filter with strainer, a flow control tube with transparent insert and connections for the discharge of the fuel by gravity into a can or by the suitable suction equipment into a collection tank.

The drill bit is activated by using a special, pneumatic drill machine with a low number of rotations and with reversal of the rotating direction.

Weight: 6 kg.



Art.no. **3118**

Conical silicone closing plugs, $\varnothing 7 \times 12$ mm, for sealing the drill holes.

Packaging unit: 100 pieces.




Art.no. **3113**

Pneumatic tank drilling machine, mobile version.

Same as art.no. 3111, but mounted on a height-adjustable device with a 4-casters base and connectable to a swivel arm for the installation on the vehicle ramp or on the column of the single-post lift (art. nos. 3100 and 3101).

Weight: 35 kg.

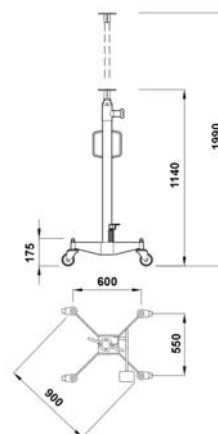

Art.no. **3115**

Mobile suction unit for petrol with pneumatic stainless steel rotary gear pump, air pressure regulator with condensation separator filter, 2-wheel trolley, plastic storage tank capacity 20 l, earthing cable for the discharge of electrostatic currents.

With pump in compliance with Atex standards, certified according to Directive 2014/34/EU.



Art. no.	Max vacuum	Inlet pressure	Compression ratio pump	Air consumption	Outlet pressure	Weight	Dimensions (LxWxH) (mm)
3115	0.8 bar	3 bar	1:1	200 l/min	3 bar	17 Kg	410x420x910

